


**PCT**WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau

## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> : <b>F02M 61/20, 45/12, 57/02</b>	<b>A1</b>	(11) International Publication Number: <b>WO 99/67529</b> (43) International Publication Date: 29 December 1999 (29.12.99)
(21) International Application Number: <b>PCT/US99/12704</b> (22) International Filing Date: <b>7 June 1999 (07.06.99)</b>  (30) Priority Data: 09/104,587 25 June 1998 (25.06.98) <b>US</b>  (71) Applicant: <b>CATERPILLAR INC. [US/US]; 100 N.E. Adams Street, Peoria, IL 61629-6490 (US).</b> (72) Inventors: <b>WEAR, Jerry, A.; 192 E. Sunset Way, East Peoria, IL 61611 (US). ZUO, Lianghe; Apartment 910, 5500 S. South Shore Drive, Chicago, IL 60637 (US).</b> (74) Agents: <b>BRAM, Eric, M. et al.; 100 N.E. Adams Street, Peoria, IL 61629-6490 (US).</b>		(81) Designated States: <b>JP, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).</b>  <b>Published</b> <i>With international search report.</i> <i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>

**(54) Title: RATE SHAPED FUEL INJECTOR WITH INTERNAL DUAL FLOW RATE ORIFICE****(57) Abstract**

A fuel injector nozzle assembly (10) includes a nozzle body (11) that defines a nozzle outlet (18). A needle valve member (30) is positioned in the nozzle body (11) and moveable between a first position in which the nozzle outlet (18) is blocked and a second position in which the nozzle outlet (18) is open. At least one of the nozzle body (11) and the needle valve member (30) define a first chamber (23) fluidly connected to a second chamber (24) by at least one dual flow rate orifice (35). The needle valve member (30) displaces fluid from the first chamber (23) into the second chamber (24) through the at least one dual flow rate orifice (35) when moving from its first position to its second position. The dual flow rate orifice (35) is sized and shaped to produce a flow restriction and to slow the movement of the needle valve member (30) when moving from its closed position to its open position, but permit relatively unrestricted displacement flow in the opposite direction.

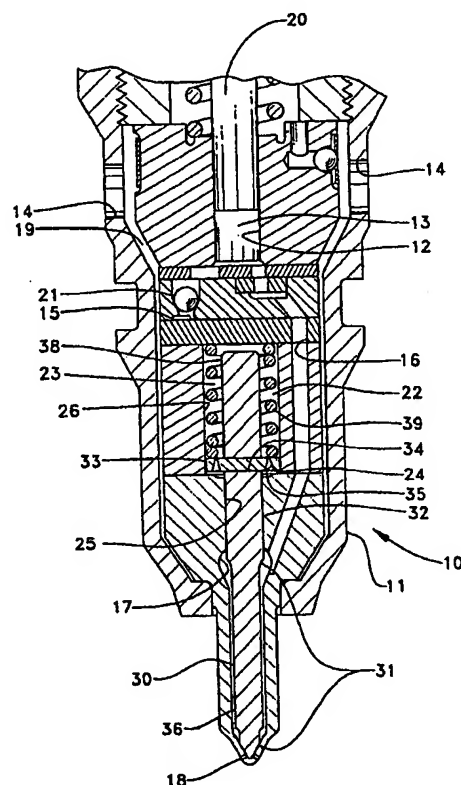

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

DescriptionRATE SHAPED FUEL INJECTOR WITH INTERNAL DUAL FLOW  
RATE ORIFICE

5

Technical Field

The present invention relates generally to fuel injector nozzle assemblies, and more particularly to the incorporation of a dual flow rate orifice into a fuel injector to rate shape an injection event by slowing the opening rate of the needle check valve.

Background Art

Over the years, engineers have come to recognize that undesirable emissions can be reduced, and performance improved, across most of an engine's operating range by making each fuel injection event begin relatively slowly and end as abruptly as possible. This type of injection mass flow rate profile is more commonly referred to in the art as rate shaping. It is well known that there have been a wide variety of devices and schemes proposed for producing desired fuel injection rate shapes for as many different fuel injectors. Unfortunately, many of these proposals are too complex for realistic mass production or too difficult to manufacture in a way that produces consistent reliable results. Others improve a front end rate shape by sacrificing on an abrupt end to injection, or vice versa.

The present invention is directed to these and other problems associated with the production of desired rate shapes in fuel injectors.

Disclosure of the Invention

A fuel injector nozzle assembly includes a nozzle body that defines a nozzle outlet. A needle

- 2 -

valve member is positioned in the nozzle body, and is moveable between a first position in which the nozzle outlet is blocked and a second position in which the nozzle outlet is open. At least one of the nozzle  
5 body and the needle valve member define a first chamber fluidly connected to a second chamber by at least one dual flow rate orifice. The needle valve member displaces fluid from the first chamber into the second chamber through the at least one dual flow rate  
10 orifice when moving from its first position to its second position.

#### Brief Description of the Drawings

Fig. 1 is a partial front sectioned  
15 diagrammatic view of a fuel injector according to one embodiment of the present invention.

Fig. 2 is an enlarged sectioned diagrammatic view of a dual flow rate orifice portion of the fuel injector of Fig. 1 according to one aspect of the  
20 present invention.

Fig. 3 is a partial front sectioned diagrammatic view of a fuel injector according to another embodiment of the present invention.

Fig. 4 is a graph of needle valve member  
25 position versus time for an injection event according to the prior art and present invention.

Fig. 5 is a graph of injection mass flow rate versus time for an injection event according to the prior art and present invention.  
30

#### Best Mode for Carrying Out the Invention

Referring now to Fig. 1, a fuel injector 10 includes an injector body 11 made up of a plurality of machined components attached to one another in a  
35 manner well known in the art. Injector body 11 defines a plunger bore 12 within which a plunger 20 is

driven to reciprocate via some suitable means, such as hydraulic fluid pressure or a cam driven tappet assembly. A portion of plunger 20 and plunger bore 12 define a fuel pressurization chamber 13 that is in fluid communication with a nozzle outlet 18 via a nozzle supply passage 16 and a nozzle chamber 17. When plunger 20 is undergoing its upward return stroke between injection events, fresh fuel is drawn into fuel pressurization chamber 13 through fuel inlet 14, along annular nozzle supply passage 19, through fuel supply passage 15, past check valve 21 and into plunger bore 12. When plunger 20 is undergoing its downward pumping stroke, check valve 21 is closed and fuel is forced into a combustion space within an engine through nozzle outlet 18 in a conventional manner.

As in a typical fuel injector, a needle valve member 30 is positioned in a nozzle body portion of injector body 11, and is moveable between an open position in which nozzle outlet 14 is open, and a closed position, as shown, in which nozzle outlet 14 is blocked. Needle valve member 30 includes a needle portion 36, a guide portion 32, a disc shaped spacer portion 33 and a pin stop portion 38. While these portions of the needle valve member could be machined from a single solid piece of a suitable metallic alloy, they are preferably machined as several separate components that are stacked atop one another as shown in Fig. 1. Needle valve member 30 includes a lifting hydraulic surface 31 exposed to fluid pressure in nozzle chamber 17, and a closing hydraulic surface 34 exposed to fluid pressure in a trapped volume chamber 22, which is defined by injector body 11.

Fuel injector 10 employs trapped volume nozzle technology in order to hasten the closure rate of the needle valve member, as described in co-owned

U.S. Patent No. 5,429,309 to Stockner. The relatively tight clearance between guide portion 32 and guide bore 25 causes trapped volume 22 to be relatively isolated and closed. Trapped volume chamber 22 is  
5 divided into a lower chamber 24 and an upper chamber 23 by spacer portion 33. Trapped volume chamber 22 is defined by a spacer guide bore 26, which has a relatively tight annular clearance 37 with spacer portion 33 so that the only substantive fluid  
10 connection between upper chamber 23 and lower chamber 24 is through dual flow rate orifices 35.

Referring now in addition to Fig. 2, needle valve member 30 is normally biased downward to its closed position by needle biasing spring 39, which is  
15 positioned in trapped volume chamber 22. When fuel pressure in nozzle chamber 17 acting on lifting hydraulic surfaces 31 is above a threshold valve opening pressure, needle valve member 30 will lift to its open position against the action of needle biasing  
20 spring 39, to commence an injection event.

When needle valve member 30 lifts, the volume of trapped chamber 22 decreases, which results in an increase in pressure. At the same time, in order for needle valve member to move upward, some  
25 fluid from upper chamber 23 must be displaced into lower chamber 24 through dual flow rate orifices 35. The present invention seeks to hydraulically slow the opening rate of needle valve member 30 by constricting this flow through dual rate flow orifices 35. In  
30 other words, if dual flow rate orifices 35 are appropriately sized, a flow restriction can take place when fluid must be displaced from upper chamber 23 into lower chamber 24 when needle valve member 30 is moving upward to its open position. This creates a  
35 temporary pressure gradient between upper chamber 23 and lower chamber 24 that hydraulically slows the

opening rate of needle valve member 30. This slowing of the needle valve open rate produces a corresponding slower increase in the fuel injection rate out of nozzle outlet 18. Thus, in order to produce the front end rate shaping according to the present invention, dual flow rate orifices 35 must present a flow restriction for fluid flow moving from upper chamber 23 to lower chamber 24.

In order to not undermine the closure rate of needle valve member 30 at the end of an injection event, it is important that dual flow rate orifices have different flow rate characteristics for fluid flow moving from lower chamber 24 to upper chamber 23. This is accomplished by shaping orifices 35 to have a relatively low flow rate coefficient for fluid flow from bottom chamber 24 to upper chamber 23, but a relatively high flow rate coefficient for fluid flow in the reverse direction. A substantial difference in flow rate coefficients is desired, which corresponds to a difference in excess of 30%. These flow characteristics can be created with a wide variety of non-symmetrical shapes, such as the frusto conical shape shown in Figs. 1 and 2. By appropriately sizing and tuning dual flow rate orifices 35, some front end rate shaping can be produced without undermining the ability of the injector to produce a relatively abrupt end to the injection event.

Each injection event begins shortly after plunger 20 starts its downward pumping stroke. This causes fuel pressure in fuel pressurization chamber 13 and nozzle chamber 17 to rise rapidly. Before needle valve member 30 lifts to its open position, fluid pressure in trapped volume chamber 22 is relatively low, or on the order of the fluid pressure in fuel inlet 14. When the pressure in nozzle chamber 17 exceeds the valve opening pressure, needle valve

member 30 begins to lift to commence the injection event. When this occurs, fluid is displaced from upper chamber 23 into lower chamber 24 through dual flow rate orifice 35. Because of the flow  
5 restriction, needle valve member 30 is hydraulically slowed in its movement, and the injection flow rate at this front end portion of the injection event rises much slower than a prior art injection event in which the needle valve member is not restricted in its  
10 movement.

While the needle valve member continues moving upward to its open position, pressure rises in trapped volume chamber 22. This is due to the decrease in total volume when the end of guide portion  
15 32 is moved into the trapped volume space. Also, because the fuel pressure in nozzle chamber 17 is relatively high, some of that fluid pressure migrates up the tight clearance area in guide bore 25 further raising the fluid pressure in trapped volume chamber  
20 22 during the injection event. The temporary difference in pressure between upper chamber 23 and lower chamber 24 during the initial opening of needle valve member 30 quickly dissipates after pin stop portion 38 has reached its upper stop. Thus, during  
25 the injection event the pressure in the upper and lower chambers equalizes to a relatively high pressure in accordance with trapped volume nozzle technology. The injection event ends when the plunger 20's downward stroke slows sufficiently that a fuel  
30 pressure drop occurs in nozzle chamber 17. When this pressure drops through a certain threshold value, the combined hydraulic force due to pressure in trapped chamber 22 acting on closing hydraulic surface 34 plus the spring force from biasing spring 39 causes needle  
35 valve member 30 to begin moving downward to its closed position. When this occurs, fluid in bottom chamber



- 7 -

24 must be displaced into upper chamber 23 through dual flow rate orifices 35. However, because of the high flow rate coefficient due to shape of these orifices, no significant flow restriction occurs and  
5 needle valve member 30 closes at nearly the same abrupt rate as a prior art needle valve member of the type described in the earlier identified Stockner patent.

Referring now to Fig. 3, a fuel injector 110  
10 according to another embodiment of the present invention uses a dual flow rate orifice 135 to produce front end rate shaping in a nozzle assembly that does not include a trapped volume chamber above a needle valve member 130. In this example, spring chamber  
15 122, which holds needle biasing spring 139, is always connected to the relatively low pressure of fuel inlet 114 via an annular fuel return/supply chamber 119 and dual flow rate orifice 135. This embodiment also differs from the previous embodiment in that a  
20 relatively large annular clearance area 137 exists between the wall of spring chamber 122 and the outer surface of spacer portion 133 as in the prior art fuel injectors of this type. In other words, this clearance area is sufficiently large that no real flow  
25 restriction exists when fluid is displaced between the area underneath spacer 133 and the area above. When needle valve member 130 lifts to its open position, fluid in spring chamber 122 is displaced through dual flow rate orifice 135 into annular fuel return/supply  
30 chamber 119. By appropriately sizing and shaping orifice 135, a flow restriction is created that slows the opening rate of needle valve member 130 in a manner similar to that of the embodiment shown in Figs. 1 and 2. Thus, the initial injection rate is  
35 slowed to produce front end rate shaping, and the injection event ends substantially identical to

similar prior art fuel injectors of this type in that the closure rate of the needle valve member is tied only to the strength of biasing spring 139 and the rate of fuel pressure drop in the nozzle chamber.

5

#### Industrial Applicability

The present invention finds potential application in any fuel injector where it is desired to have a needle valve member that opens at one slower rate and closes at another faster rate. The present invention accomplishes this by arranging the components in such a way that a first chamber is separated from a second chamber by a dual flow rate orifice. These components are arranged such that when the needle valve member moves to its open position, fluid is displaced from one chamber to the other chamber through the dual flow rate orifice. The shape and sizing of the dual flow rate orifice are preferably arranged such that a flow restriction is created when the needle valve member is moving toward its open position so that its opening rate is slowed and the initial injection rate is shaped. The hydraulic slowing of the present invention can be further tuned through sizing of the two chambers, closing or venting the chambers and by controlling the total volume of fluid that must be displaced between the chambers when the needle valve opens. Because fluid must flow through the dual flow rate orifice in the reverse direction when the needle valve member is closing, the orifice is shaped and sized such that it permits relatively unrestricted flow in this reverse direction when the needle valve member is moving toward its closed position. This ensures that the closure rate of the needle valve member is not undermined. Those skilled in the art will appreciate that a wide variety of different shaped passageways

can produce the dual flow rate characteristics of the present invention. The flow coefficient in one direction can be as much as 30% up to 100%, or more, higher than the flow coefficient in the reverse  
5 direction. This difference in flow coefficient allows the dual flow rate orifice to functionally produce a restriction in one direction but have a virtually negligible effect in the opposite direction.

The above description is intended for  
10 illustrative purposes only, and is not intended to limit the scope of the present invention in any way. For instance, another embodiment of the present invention could include shaping the spacer element to have a frusto conical shape such that flow around its  
15 outer surface when the needle valve member moves creates an annular dual flow rate orifice in accordance with the present invention. Thus, various modifications could be made to the disclosed  
embodiments without departing from the intended spirit  
20 and scope of the present invention, which is defined in terms of the claims set forth below.

Claims

1. A nozzle assembly comprising:

5 a nozzle body 11 defining a nozzle outlet  
(18);

a needle valve member (30,130) positioned in  
said nozzle body (11), and being moveable between a  
first position in which said nozzle outlet (18) is  
10 blocked and a second position in which said nozzle  
outlet (18) is open;

at least one of said nozzle body (11) and  
said needle valve member (30,130) defining a first  
chamber (23,122) fluidly connected to a second chamber  
15 (24,119) by at least one dual flow rate orifice  
(35,135); and

said needle valve member (30,130) displacing  
fluid from said first chamber (23,122) into said  
second chamber (24,119) through said at least one dual  
20 flow rate orifice (35,135) when moving from said first  
position to said second position.

2. The nozzle assembly of claim 1 wherein  
said at least one dual flow rate orifice (35,135) has  
25 a first flow rate coefficient for fluid flow from said  
first chamber (23,122) to said second chamber  
(24,119);

said at least one dual flow rate orifice  
(35,135) has a second flow rate coefficient for fluid  
30 flow from said second chamber (24,119) to said first  
chamber (23,122); and

said first flow rate coefficient is  
substantially smaller than said second flow rate  
coefficient.

- 11 -

3. The nozzle assembly of claim 2 wherein said first chamber (23) and said second chamber (24) are parts of a trapped volume chamber (22).

5           4. The nozzle assembly of claim 2 wherein said needle valve member (30) includes a disc shaped spacer (33) that separates said first chamber (23) from said second chamber (24).

10           5. The nozzle assembly of claim 4 wherein said at least one dual flow rate orifice (35) is defined by said spacer (33).

15           6. The nozzle assembly of claim 2 wherein said nozzle body (11) defines said at least one dual flow rate orifice (135).

20           7. The nozzle assembly of claim 6 wherein said second chamber is a low pressure fuel supply/return area (119).

25           8. The nozzle assembly of claim 6 further comprising a compression spring (139) operably positioned in said first chamber (122) to bias said needle valve member (130) toward said first position.

30           9. The nozzle assembly of claim 2 wherein said at least one dual flow rate orifice (35,135) includes a conical portion.

35           10. The nozzle assembly of claim 2 wherein said at least one dual flow rate orifice (35,135) is sufficiently restrictive to fluid flow that said needle valve member (30,130) is hydraulically slowed when moving from said first position to said second

- 12 -

position due to a pressure increase in said first chamber (23,122).

11. A fuel injector (10,110) comprising:
- 5 an injector body (11) defining a nozzle outlet (18);
- a needle valve member (30,130) positioned in said injector body (11), and being moveable between a first position in which said nozzle outlet (18) is blocked and a second position in which said nozzle outlet (18) is open;
- 10 at least one of said injector body (11) and said needle valve member (30,130) defining a first chamber (23,122) fluidly connected to a second chamber (24,119) by at least one dual flow rate orifice (35,135);
- said needle valve member (30,130) displacing fluid from said first chamber (23,122) into said second chamber (24,119) through said at least one dual flow rate orifice (35,135) when moving from said first position to said second position; and
- 20 a compression spring (39,139) operably positioned in one of said first chamber (23,122) and said second chamber (24,119) to bias said needle valve member (30) toward said first position.
- 25

12. The fuel injector (10,110) of claim 11 wherein said at least one dual flow rate orifice (35,135) is sufficiently restrictive to fluid flow
- 30 that said needle valve member (30,130) is hydraulically slowed when moving from said first position to said second position due to a pressure increase in said first chamber (23,122).

13. The fuel injector (10,110) of claim 12 wherein said at least one dual flow rate orifice
- 35

- 13 -

(35,135) has a first flow rate coefficient for fluid flow from said first chamber (23,122) to said second chamber (24,119);

5       said at least one dual flow rate orifice  
(35,135) has a second flow rate coefficient for fluid flow from said second chamber (24,119) to said first chamber (23,122); and

10       said first flow rate coefficient is substantially smaller than said second flow rate coefficient.

14. The fuel injector (10) of claim 13 wherein said first chamber (23) and said second chamber (24) are parts of a trapped volume chamber  
15       (22).

15. The fuel injector (10) of claim 14 wherein said needle valve member (30) includes a disc shaped spacer (33) that separates said first chamber  
20       (23) from said second chamber (24).

16. The fuel injector (10) of claim 15 wherein said at least one dual flow rate orifice (35) is defined by said spacer (33).  
25

17. The fuel injector (110) of claim 13 wherein said injector body (11) defines said at least one dual flow rate orifice (135).

30       18. The fuel injector (110) of claim 17 wherein said injector body (11) defines a fuel inlet (114); and

      said second chamber (119) is fluidly connected to said fuel inlet (114).

35

- 14 -

19. The fuel injector (10,110) of claim 13 wherein said at least one dual flow rate orifice (35,135) includes a conical portion.

- 5                   20. A fuel injector (10) comprising:  
                  an injector body (11) defining a nozzle  
                  outlet (18) and a trapped volume chamber (22);  
                  a needle valve member (30) positioned in  
                  said injector body (11), and being moveable between a  
10               first position in which said nozzle outlet (18) is  
                  blocked and a second position in which said nozzle  
                  outlet (18) is open, and said needle valve member (30)  
                  includes a spacer (33) positioned in said trapped  
                  volume chamber (22);  
15               said spacer (33) dividing said trapped  
                  volume chamber (22) into a first chamber (23) and a  
                  second chamber (24), and said spacer (33) defining at  
                  least one dual flow rate orifice (35) fluidly  
                  connecting said first chamber (23) to said second  
20               chamber (24), and said at least one dual flow rate  
                  orifice (35) including a conical portion;  
                  said needle valve member (30) displacing  
                  fluid from said first chamber (23) into said second  
                  chamber (24) through said at least one dual flow rate  
25               orifice (35) when moving from said first position to  
                  said second position;  
                  a compression spring (39) operably  
                  positioned in said injector body (11) to bias said  
                  needle valve member (30) toward said first position;  
30               said at least one dual flow rate orifice  
                  (35) being sufficiently restrictive to fluid flow that  
                  said needle valve member (30) is hydraulically slowed  
                  when moving from said first position to said second  
                  position due to a pressure increase in said first  
35               chamber (23);



said at least one dual flow rate orifice  
(35) has a first flow rate coefficient for fluid flow  
from said first chamber (23) to said second chamber  
(24) and a second flow rate coefficient for fluid flow  
5 from said second chamber (24) to said first chamber  
(23); and

said first flow rate coefficient is  
substantially smaller than said second flow rate  
coefficient.

1/3

Fig-1-



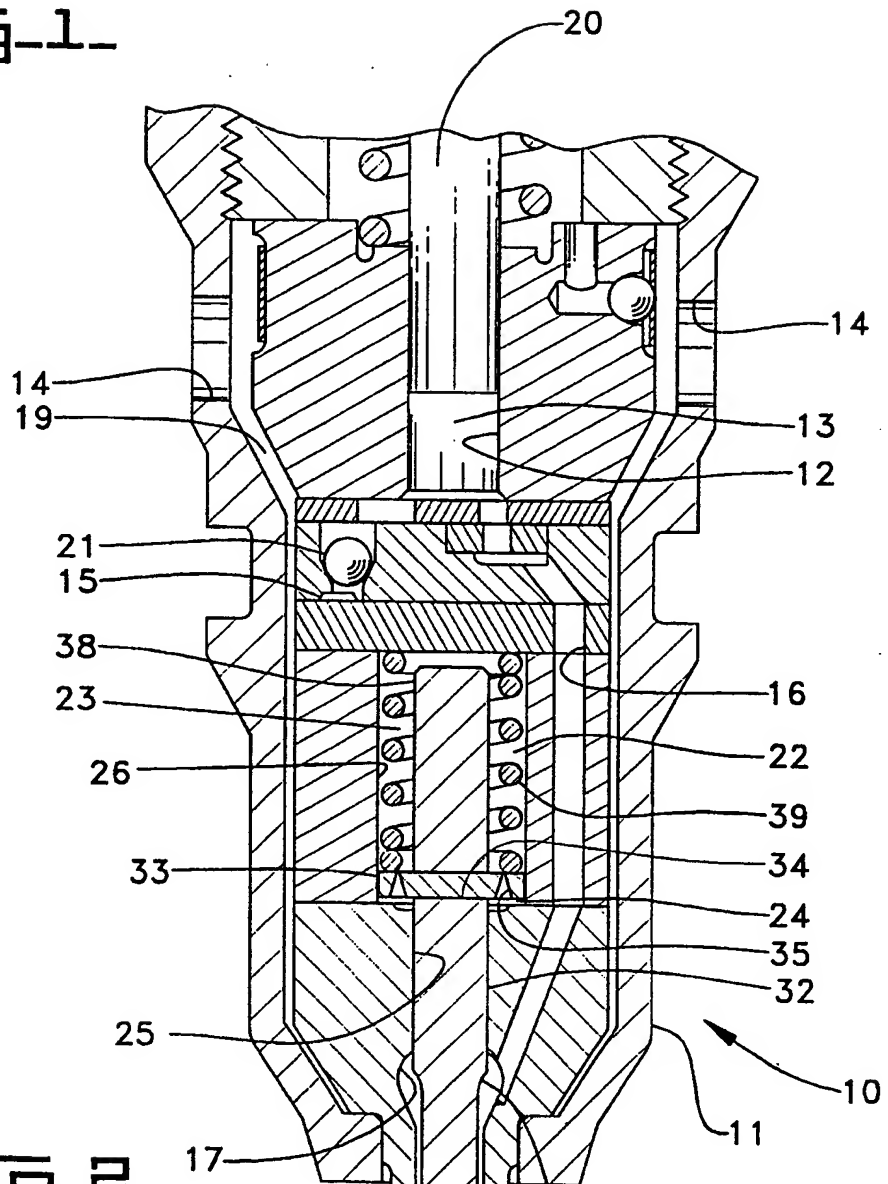


Fig-2-

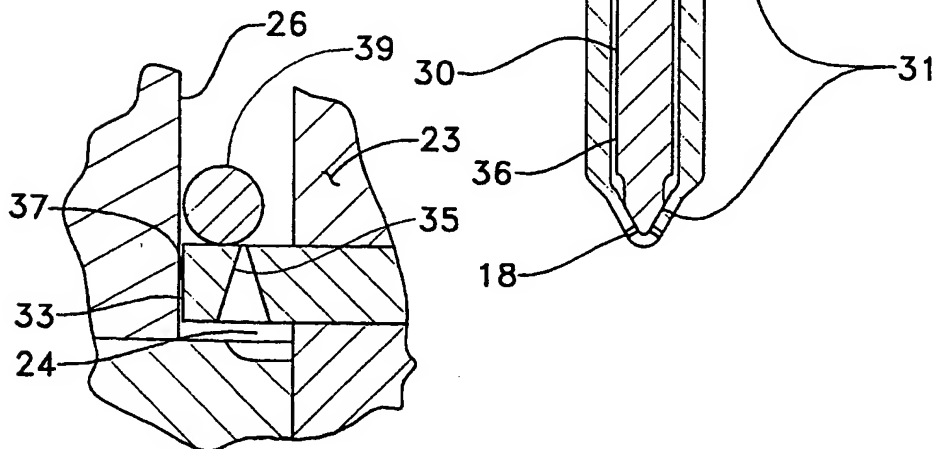

2/3

Fig. 3.

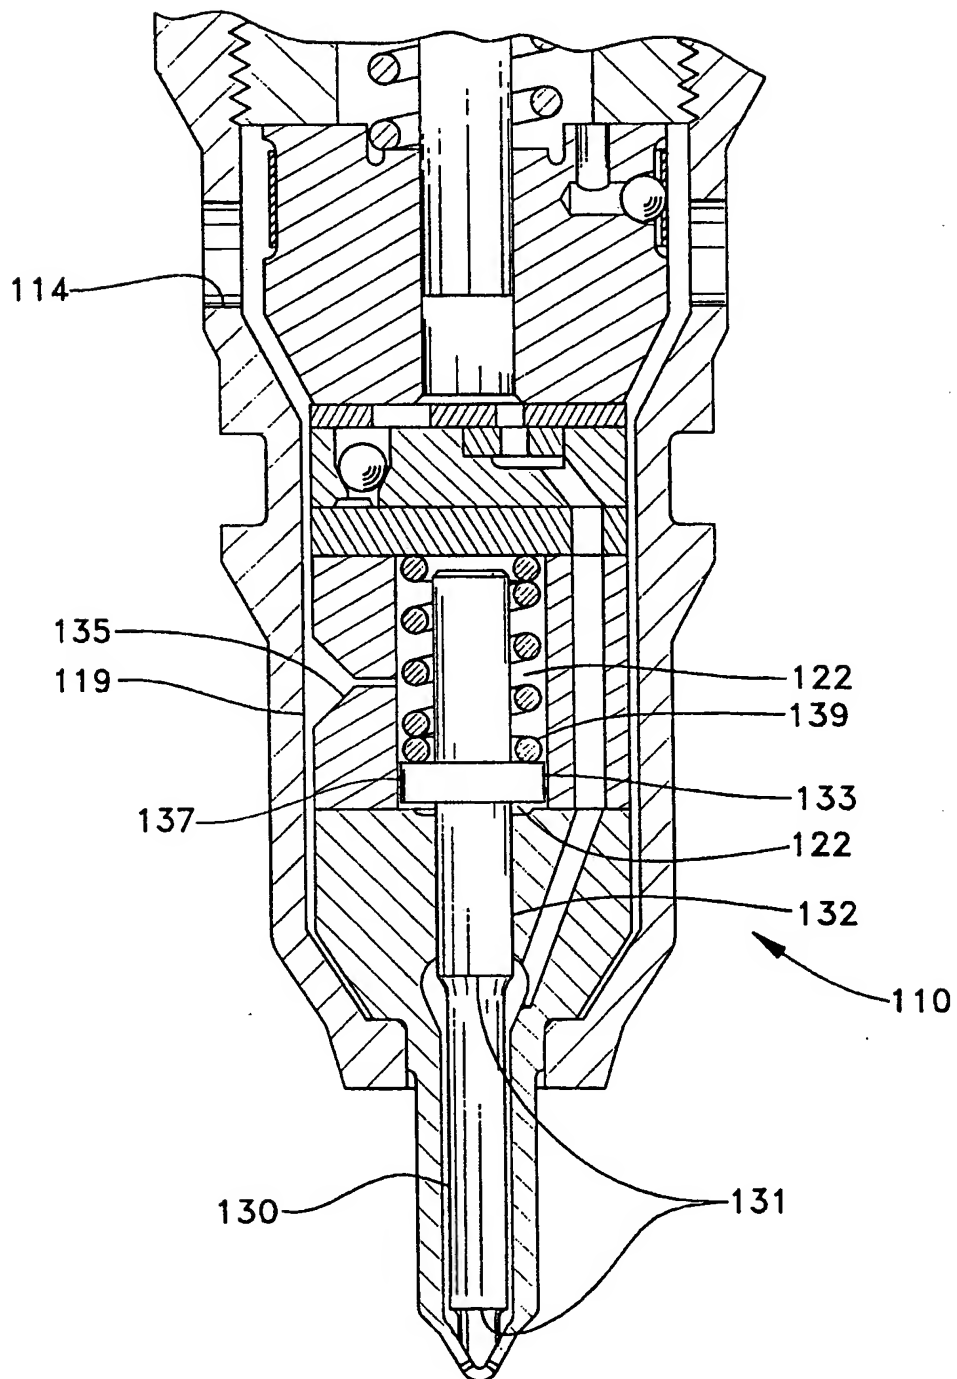

WO 99/67529

3/3

Fig-4-

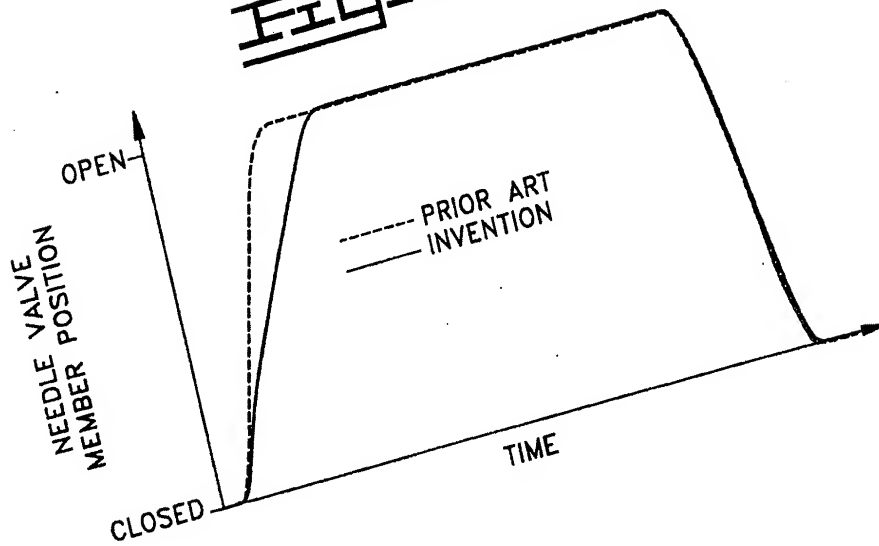


Fig-5-

